

Regular 160 Minus Aspheric - Dia65mm, Dia70mm & Dia75mm, UV400

Price List

USD/Pair

	Sph.							
	-G2, -G4 & -G6	-G8	-G10	-G12 ³	-G14 ³	-G16 ³	-G18 ³	-G20 ³
HMC+EMI ¹	3.000	3.000	3.000	3.500	3.500	3.500	4.000	4.000
HMC+EMI ¹ , UV400+Blue Cut ²	3.500	3.500	3.500					

	Sph./Cyl.							
	-G2.2, -G4.2 & -G6.2	-G8.2	-G10.2	-G12.2 ³	-G14.2 ³	-G16.2 ³	-G18.2 ³	-G20.2 ³
HMC+EMI ¹	3.000	3.000	3.000	4.000	4.0000	4.000	4.500	4.500
HMC+EMI ¹ , UV400+Blue Cut ²	3.500	3.500	3.500					

	Sph./Cyl.							
	-G2.4, -G4.4 & -G6.4	-G8.4	-G10.4	-G12.4 ³	-G14.4 ³	-G16.4 ³	-G18.4 ³	-G20.4
HMC+EMI ¹	4.000	4.500	4.500	5.000	5.000	5.000	5.500	
HMC+EMI ¹ , UV400+Blue Cut ²	4.500							

Remark 1 HMC+EMI including Hard + AR Multi-coating + Hydrophobic and Electro Magnetic Interference Blocking.

Super Hydrophobic is available with a surcharge of USD0.30/pair and min. quantity of each shipment is 3,000 pairs.

Remark 2 UV400+Blue Cut cuts off harmful ultraviolet light (UV) and absorbs high-energy blue light.

Remark 3 0.50 per step instead of 0.25.



Semi-finished Lens

USD/Pair

Dia. (mm)	Curve		C. Thick. (mm)	Curve Radius (mm)		Price
	CVX(+)	CCV(-)		CVX(+)	CCV(-)	
70	0.00	6.00	6.0	0	87	5.250
70	2.00	6.00	6.0	262	87	5.250
70	4.00	6.00	6.0	131	87	5.250
70	6.00	6.00	6.0	87	87	5.250
70	8.00	4.00	10.0	65	131	5.500
70	10.00	4.00	12.0	52	131	5.500

- The edge thickness of minus specifications is available up to 20.0mm; the center thickness of plus specifications is available up to 20.0mm;
- The extra fee of adding each 1.0mm on thickness is USD2.00/pair.
- The extra fee for making Hard-coating (Non-tintable) on both sides is USD0.50/pair.
- The extra fee for making Hard-coating (Non-tintable) on both sides and AR Multi-coating + Hydrophobic + EMI coating on the convex (+) side is USD1.00/pair.
- The extra fee for making Hard-coating (Non-tintable) on both sides and AR Multicoating + Hydrophobic + EMI coating on the convex (+) side together with Blue Cut is USD2.00/pair.

Curve & Thickness


Sph.	Curve		C. Thick. (mm)
	CVX (+)	CCV (-)	
0.00	4.00	4.00	2.0
.25	3.75	4.00	2.0
.50	3.50	4.00	2.0
.75	3.25	4.00	2.0
-1.00	3.00	4.00	2.0
.25	3.25	4.50	1.8
.50	3.00	4.50	1.8
.75	2.75	4.50	1.8
-2.00	2.50	4.50	1.8
.25	2.75	5.00	1.6
.50	2.50	5.00	1.6
.75	2.25	5.00	1.6
-3.00	2.00	5.00	1.6
.25	2.25	5.50	1.4
.50	2.00	5.50	1.4
.75	1.75	5.50	1.4
-4.00	1.50	5.50	1.4
.25	1.75	6.00	1.2
.50	1.50	6.00	1.2
.75	1.25	6.00	1.2
-5.00	1.00	6.00	1.2
.25	1.25	6.50	1.0
.50	1.00	6.50	1.0
.75	0.75	6.50	1.0
-6.00	0.50	6.50	1.0
.25	1.25	7.50	1.0
.50	1.00	7.50	1.0
.75	0.75	7.50	1.0
-7.00	0.50	7.50	1.0
.25	1.25	8.50	1.0
.50	1.00	8.50	1.0
.75	0.75	8.50	1.0
-8.00	0.50	8.50	1.0
.25	1.25	9.50	1.0
.50	1.00	9.50	1.0
.75	0.75	9.50	1.0
-9.00	0.50	9.50	1.0

Sph.	Curve		C. Thick. (mm)
	CVX (+)	CCV (-)	
-9.25	1.25	10.50	1.0
.50	1.00	10.50	1.0
.75	0.75	10.50	1.0
-10.00	0.50	10.50	1.0
.25	1.25	11.50	0.8
.50	1.00	11.50	0.8
.75	0.75	11.50	0.8
-11.00	0.50	11.50	0.8
.25	1.25	12.50	0.8
.50	1.00	12.50	0.8
.75	0.75	12.50	0.8
-12.00	0.50	12.50	0.8
.25	1.25	13.50	0.8
.50	1.00	13.50	0.8
.75	0.75	13.50	0.8
-13.00	0.50	13.50	0.8
.25	1.25	14.50	0.8
.50	1.00	14.50	0.8
.75	0.75	14.50	0.8
-14.00	0.50	14.50	0.8
.25	1.25	15.50	0.8
.50	1.00	15.50	0.8
.75	0.75	15.50	0.8
-15.00	0.50	15.50	0.8
.25	1.25	16.50	0.8
.50	1.00	16.50	0.8
.75	0.75	16.50	0.8
-16.00	0.50	16.50	0.8
.25	1.25	17.50	0.8
-17.00	0.50	17.50	0.8
.50	1.00	18.50	0.8
.75	0.75	18.50	0.8
-18.00	0.50	18.50	0.8
.25	1.25	19.50	0.8
-19.00	0.50	19.50	0.8
.50	1.00	20.50	0.8
-20.00	0.50	20.50	0.8



1.60/1.67 Hi-index

Available Power Range

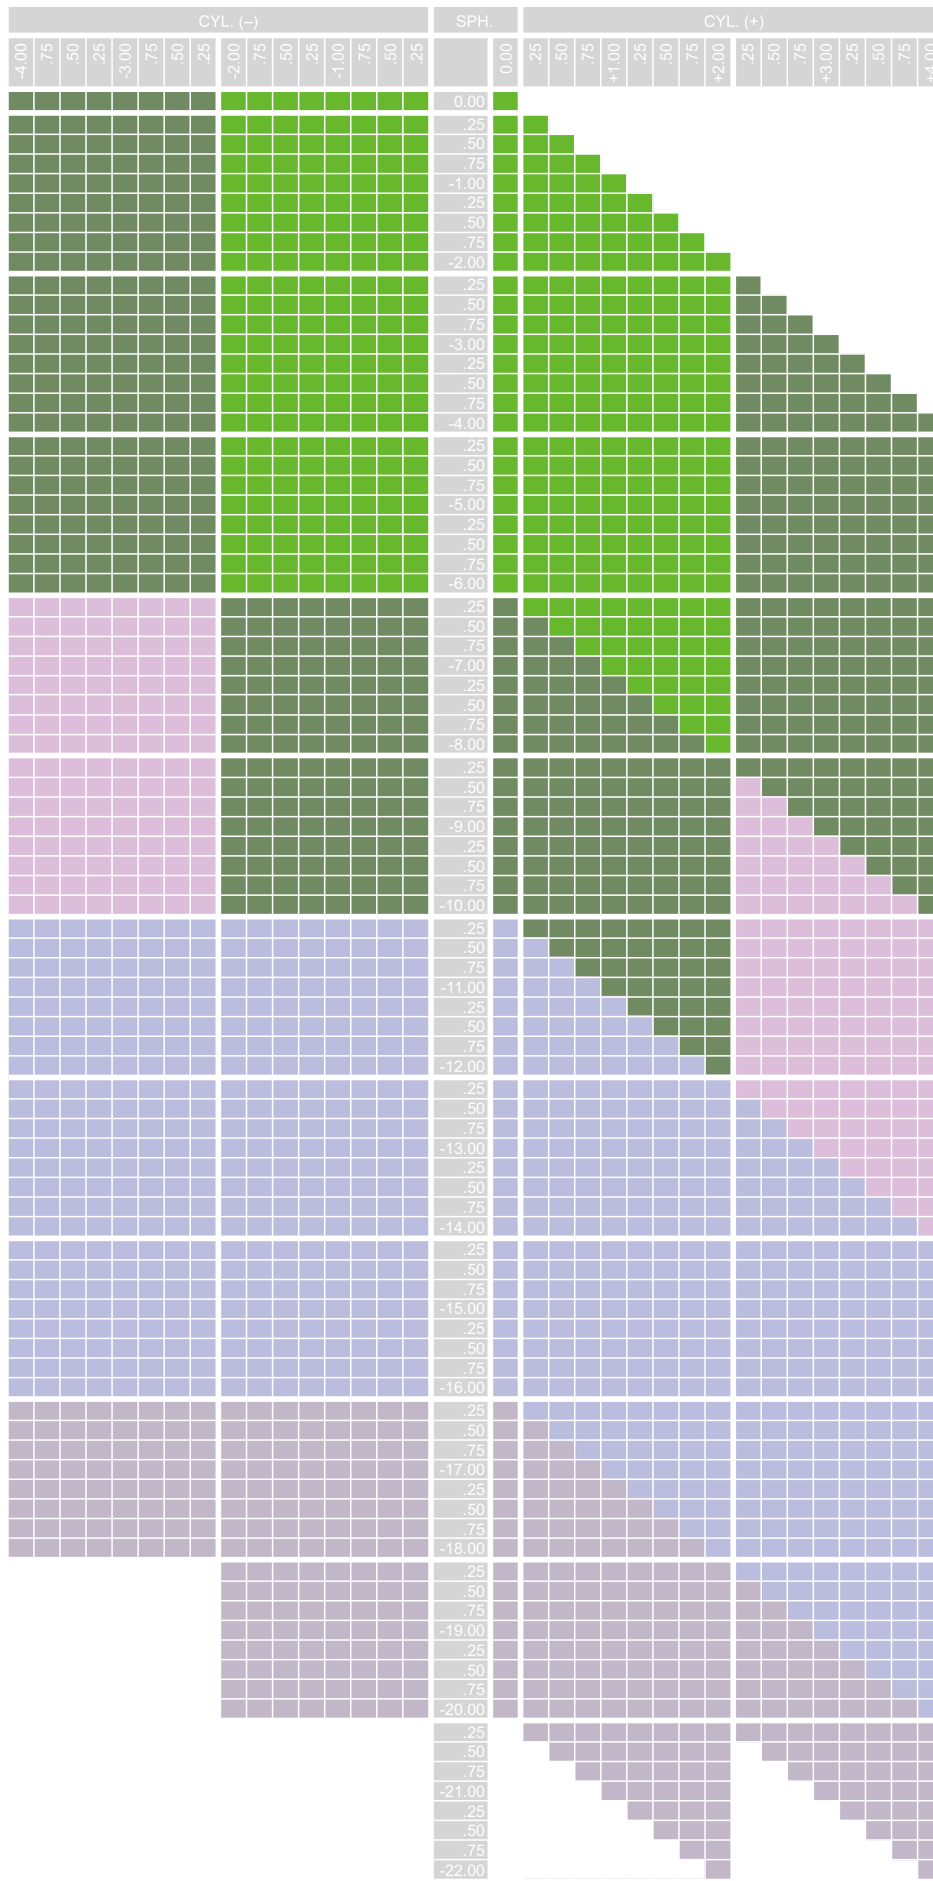

- 0.25 per step, Dia75mm, aspheric design
UV400+Blue Cut is available
- 0.25 per step, Dia70mm, aspheric design
UV400+Blue Cut is available
- 0.25 per step, Dia70mm, aspheric design
- 0.25 per step, Dia65mm, aspheric design
- 0.50 per step, Dia65mm, aspheric design